

Better Physical Performance

GlasRoc® Sheathing meets or exceeds all physical property requirements. Results showed improved physical performance compared to glass-faced gypsum sheathing including:

- Reduced humidified deflections
- Superior flexural strengths
- Excellent nail-pull resistance

Enhanced Dimensional Stability


GlasRoc® Sheathing will withstand normal exposure to UV, rain, wind, ice, and snow.

It is dimensionally stable under changes in temperature and relative humidity.

Excellent Fire Protection

GlasRoc® Sheathing, with its acrylic coating, is noncombustible and offers superior fire performance compared to paper-faced sheathings. It has a zero flame spread and zero smoke developed index when tested per ASTM E 84 (CAN/ULC-S102) for surface burning characteristics.

GlasRoc® Sheathing Type X is UL Classified for Fire Resistance for use in fire-rated designs. (UL Designation - Type EGRG).

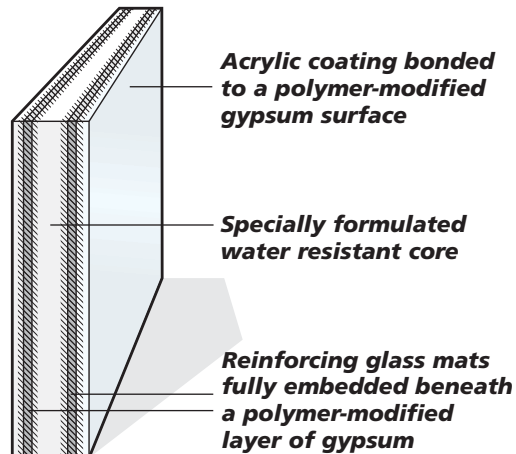

Long Term Protection to Weather Exposure

GlasRoc® Sheathing, with its homogenous water resistance throughout the board, offers superior freeze/thaw resistance. It will withstand exposure to UV, rain, wind, ice and snow. To back it up, CertainTeed provides a 6 month exposure limited warranty. GlasRoc® Sheathing provides enhanced surface liquid water resistance while allowing the building's vapor drive to be unimpeded.

Mold and Mildew Resistance

Because GlasRoc® Sheathing contains no starches, sugars, paper facing or pulp, it will resist mold and mildew growth.

Increased Durability

GlasRoc® Sheathing resists delamination because the glass mats are fully-embedded into the panel, creating a more durable, dimensionally stable panel.

Standards and Code Compliance

GlasRoc® Sheathing conforms to ASTM C 1177, applicable ASTM C 931 and C 79 standards, and ICC ES NER-674. Installation standards, where applicable, are Gypsum Association Publication GA-253, GA-216 and ASTM C 1280 for gypsum sheathing and soffits.

- ICC-ES Legacy Report NER-674
- NYC MEA 312-03-M
- CCMC Evaluation Report #13095-R
- Florida Product Approval # FL3029

Distributed by:

ASK ABOUT OUR OTHER CERTAINTEED PRODUCTS:

EXTERIOR: ROOFING • SIDING • WINDOWS • FENCE • DECKING • RAILING • MILLWORK • FOUNDATIONS • PIPE
INTERIOR: INSULATION • WALLS • CEILINGS

CertainTeed Corporation
P.O. Box 860
Valley Forge, PA 19482

Professional: 800-233-8990
Consumer: 800-782-8777
www.certainteed.com



CertainTeed

Characteristics, properties or performance of materials or systems manufactured by CertainTeed herein described are derived from data obtained under controlled test conditions. CertainTeed makes no warranties, express or implied, as to their characteristics, properties or performance under any variations from such conditions in actual construction. CertainTeed assumes no responsibility for the effects of structural movement.

© TM CertainTeed and the tagline "Quality made certain. Satisfaction guaranteed." are trademarks of CertainTeed Corporation. All other trademarks are the property of BPB plc or its affiliates and related companies. Dens Glass Gold is a trademark of Georgia-Pacific.

NOTICE: The information in this document is subject to change without notice. CertainTeed assumes no responsibility for any errors that may inadvertently appear in this document.

©01/07 CertainTeed Corporation Form # CTG-5205/5M/1-2007

CertainTeed

GlasRoc®

BRAND

High Performance Exterior Sheathing

Featuring Patented Enhanced GRG Technology



CertainTeed

Quality made certain. Satisfaction guaranteed.™

GlasRoc® Sheathing*

BPB Joins CertainTeed

We are pleased to announce that BPB has joined CertainTeed in an acquisition by parent company, Saint-Gobain, creating the largest building materials manufacturer in the world.

CertainTeed Corporation has helped shape the building products industry for more than 100 years. Founded in 1904 as General Roofing Company, the firm made its slogan "Quality Made Certain, Satisfaction Guaranteed," which quickly inspired the name CertainTeed.

Today, CertainTeed is pleased to offer the GlasRoc® Brand of High Performance Sheathing.



GlasRoc® Brand Sheathing Offers:

- Long term protection (6 months) to weather exposure.
- A superior water resistant surface that does not inhibit water vapor permeance.
- Excellent fire resistance properties, and numerous fire rated designs.
- Mold and mildew resistance.
- Compatibility with most exterior wall systems and applications.
- Conformity to design and code requirements.
- Strength — with enough flexibility to bend to curved surfaces.
- A lightweight sheathing that cuts like regular gypsum board and is easy to handle and install — with minimal skin irritation due to fully-embedded glass mats.

GlasRoc® Sheathing is the next generation of the industry standard for high-performance, weather-resistive, gypsum-based sheathing. To back it up, CertainTeed provides a:

- 6 month limited warranty against exposure
- 5 year limited warranty assuring product performance
- 10 year substrate limited warranty in architecturally-specified EIF Systems

Easy to Handle and Install

GlasRoc® Sheathing is handled and installed like regular paper-faced sheathing. In addition, it:

- Can be scored and cut with a standard utility knife. No special tools required.
- Snaps free after scoring only one face.
- Attaches to framing with the same fasteners used for paper-faced gypsum. No special fasteners required.
- Is easier to handle because skin irritations are minimized due to the fully-embedded glass mats and our innovative acrylic coating.
- Has uniform field and edge hardness, making trimming & fastening quick and easy.

HIGH-PERFORMANCE SHEATHING COMPARISON

Properties	Products - 1/2" (12.7 mm)			Products - Fire-Rated 5/8" (15.9 mm)			Test Method/Reference
	GlasRoc® Sheathing	Dens-Glass Gold® Sheathing	Fiberock® Aqua-Tough™ Sheathing	GlasRoc® Sheathing Type X	Dens-Glass Gold® Sheathing	Fiberock® Aqua-Tough™ Sheathing	

Physical Characteristics:

Nominal Width	48" (1219 mm)	48" (1219 mm)	48" (1219 mm)	48" (1219 mm)	48" (1219 mm)	48" (1219 mm)	-
Weight - Lbs/Square Foot (Kg/m²)	1.9 (9.3)	1.9 (9.3)	2.2 (10.7)	2.4 (11.7)	2.5 (12.2)	3.0 (14.6)	-
Standard Length	8' *	8', 9', 10'	8', 9', 10', 11', 12'	8' *	8', 9', 10'	8', 9', 10', 11', 12'	-
Face Surface	Acrylic/Gypsum	Glass Mat	Gypsum Fiber	Acrylic/Gypsum	Glass Mat	Gypsum Fiber	-

Pliability:

Bending Radius - Dry, Lengthwise, Feet (mm)	6' (1800)	6' (1800)	30' (9000)	8' (2400)	8' (2400)	30' (9000)	-
---	-----------	-----------	------------	-----------	-----------	------------	---

Strength:

Racking Strength - Lbs/Lin.Ft. - (kN/m) Design Value	108 (1.58)	99 (1.44)	150 (2.19)	120 (1.75)	-	175 (2.55)	ASTM E 72 NER Reports
Parallel Flexural Strength - Lbs. (N)	100 (445)	80 (356)	124 (552)	135 (600)	100 (445)	189 (841)	ASTM C 473

Water Resistance:

Humidified Deflection (Sag) - Inches (mm)	1/16 (1.6)	2/8 (6)	-	1/64 (0.4)	1/8 (3)	-	ASTM C 473
---	------------	---------	---	------------	---------	---	------------

Water Vapor Transmission:

Permeance - perms (ng/Pa•s•m²)	26 (1500)	23 (1320)	35 (2030)	21 (1200)	17 (970)	28 (1620)	ASTM E 96
--------------------------------	-----------	-----------	-----------	-----------	----------	-----------	-----------

Thermal Resistance:

"R" Value - sq.ft.•h•°F/Btu (K•m²/W)	0.51 (0.090)	0.56 (0.099)	0.5 (0.088)	0.51 (0.090)	0.67 (0.118)	0.6 (0.106)	ASTM C 518
--------------------------------------	--------------	--------------	-------------	--------------	--------------	-------------	------------

Fire Performance:

Flame Spread/Smoke Developed	0/0	10/0	5/0	0/0	10/0	5/0	ASTM E 84 (CAN/ULC-S102)
Combustibility:	Noncombustible	Noncombustible	-	Noncombustible	Noncombustible	-	ASTM E 136

Dimensional Stability:

Thermal Coefficient of Linear Expansion - in./in./°F (mm/mm/°C)	6.4 X 10 ⁻⁹ (11.5 X 10 ⁻⁹)	8.5 X 10 ⁻⁶ (15.3 X 10 ⁻⁶)	-	6.4 X 10 ⁻⁹ (11.5 X 10 ⁻⁹)	8.5 X 10 ⁻⁶ (15.3 X 10 ⁻⁶)	-	ASTM E 228
---	---	---	---	---	---	---	------------

Mold Resistance:

Mold Resistance Rating**	10**	10**	10**	10**	10**	10**	ASTM D 3273/D 3274
--------------------------	------	------	------	------	------	------	--------------------

*Other lengths available. Ask your CertainTeed sales representative. ** No mold growth detected. Note 10 is highest rating possible.